

Work Order ID 141610

Friday, February 05, 2016 8:47:15 AM

141610

Page 1

Item ID: D3281-3L02 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: Floor Protector, Aft LH (Black)
Start Date: 2/3/2016 Start Qty: 2.00 *?
Required Date: 2/3/2016 Req'd Qty: 2.00 *?
Cust Item ID:
Customer:
Reference:

Approvals: Process Plan: MLS Date: FEB 09 2016 Tooling: _____ Date: _____
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____
Run Start ***NR1***
Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D3281	Rev F								
DSI 9504	A								DAG 07 9-09
100		0.00							
100	HAND FINISHING THERMOFORMING					2			
Thermoform	Memo	0.00							16/02/17
Thermoforming Machine	Cut Blanks								
105		0.00							DAG 07 9-09
105	Dry Material					2			
HandThermo	Memo	0.00							16/02/17
Hand Finishing Thermoforming	Dry Sheet as per QSI022 POLYCARBONATE								
	Temp: <u>245 deg. F</u>								
	Time IN: <u>5:00 PM</u>								
	Time OUT: <u>6:00 AM</u>								
	FEB 17 2016								
	Per..... <u>SL</u>								

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐	AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐			
Date :	Step #:	QTY Effective :		MRB (QSI042) Approval	
Description Work Order Deviation		Disposition			
				Completed By	
				Lead hand / Supervisor Approval Verification	
				QC / QA Coordinator Approval	
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐			
OTHER : ☐					

Work Order ID 141610

Friday, February 05, 2016 8:47:15 AM

141610

Page 2

Item ID: D3281-3L02 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: Floor Protector, Aft LH (Black)
Start Date: 2/3/2016 Start Qty: 2.00 ***2*** Cust Item ID:
Required Date: 2/3/2016 Req'd Qty: 2.00 ***2*** Customer:
Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start ***NR1***
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
110 *110* Thermoform Thermoforming Machine	THERMOFORMING MACHINE Memo Thermoform as per Dwg. D3281 and Folio FTA 009 Dwg. Rev. <u>F</u> Folio Rev. <u>E</u>	0.00 0.01							DAS 07 9-89 16/02/17
130 *130* Thermoform Thermoforming Machine	HAND FINISHING THERMOFORMING Memo Trim to Finished Dimensions	0.00 0.01				2			DAS 07 9-89 16/02/18
140 *140* QC Quality Control	QC2- Inspect parts off machine FAI/FAIB Memo	0.00 0.00				2			DAS 07 9-89 16/02/18

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐	AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐			
Date :	Step #:	QTY Effective :		MRB (QS1042) Approval	
Description Work Order Deviation		Disposition		Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval	
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐			
		OTHER : ☐			

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval		
Description Work Order Deviation				Disposition					
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐							
		OTHER : ☐							

Picklist Print

Friday, February 05, 2016 8:47:19 AM

Page 1

Work Order ID: 141610

141610

Parent Item: D3281-3L02

D3281-3L02

Parent Item Name: Floor Protector, Aft LH (Black)

Start Date: 2/3/2016

Required Date: 2/3/2016

Start Qty: 2.00

Required Qty: 2.00

Comments:

IPP Rev:A04.07.01New issueKJ/JLM

IPP Rev B 07.08.07 Thermoform in house DL

IPP Rev. C

Add Step 105 Dry Material 10/04/21 DL

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
MLEXS.093-F6006-02		Purchased					sf	1,020.887		8.666			DAS 07 9-89
MI FXS 093-F6006-02													
GE PLASTICS LEXAN SHEET													

Location

Loc Qty

Loc Code

therm

1020.88737

m127208

1020.88737

8.666 sf H

16/02/17

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :				MRB (QS1042) Approval Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval	
Description Work Order Deviation				Disposition					
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Misabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐							
		OTHER : ☐							

DART AEROSPACE LTD		Work Order: 147610
Description: Floor Protector, Aft LH		Part Number: D3281-3
Inspection Dwg: D3281	Rev: F	Page 1 of 1

FIRST ARTICLE INSPECTION CHECKLIST
THERMOFORMING SECTION

Description	Accept	Reject	Method of Inspection	Comments
Inside Radii less than 0.1875"	✓			
Shape Definition	✓			
Texture Retention	✓			
Material imperfections such as bumps, cracks, voids, scratching	✓			


Measured by: 07	Date: 16/02/17
------------------------	-----------------------

TRIMMING SECTION

Drawing Dimension	Tolerance	Actual Dimension	Accept	Reject	Method of Inspection	Comments
17.8	+/-0.100	17.7"	✓			
17.1	+/-0.100	17.0"	✓			
14.3	+/-0.100	14.34"	✓			
0.95	+/-0.030	0.95"	✓			
0.050	Min	0.060"	✓			
0.070	Min	0.087"	✓			

Measured by: 07	Date: 16/02/18
Audited by: 38	Date: FEB 22 2016
Preliminary Approval:	Date:

Rev	Date	Change	Revised by	Approved
A	08.02.28	New Issue	KJ/DL	
B	08.04.16	Dimensions updated per Dwg Rev D	KJ/DL	
C	08.09.12	Tolerance revised for 0.070 dimension	KJ/DL	
D	10.09.01	Dimensions updated per Dwg Rev E	KJ	
E	11.06.21	Dwg Rev updated	KJ	

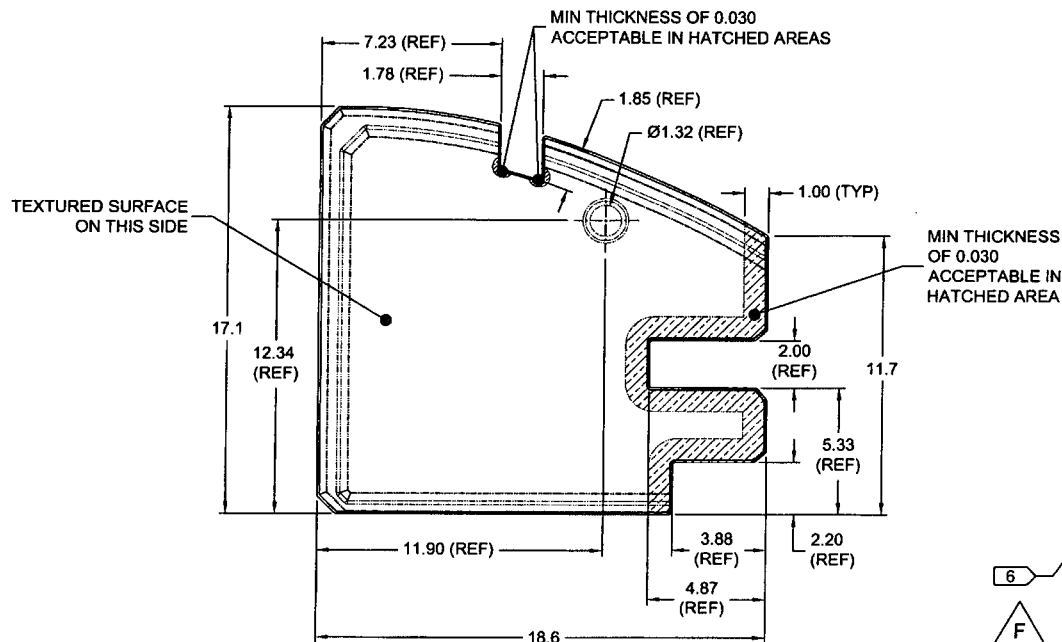


D3281-1 FLOOR PROTECTOR

NOTES:

- 1) MATERIAL: -1L02 = LEXAN F6006, BLACK No. 701, 0.093" THICK (MLEXS.093-F6006-02)
-1L08 = LEXAN 90318 (PROTECT-A-GLAZE), 0.118 THICK, 112-CLEAR (MLEXS.118-90318-08)
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 MAX
- 6) IDENTIFICATION: IDENT WITH DART P/N "D3281-1Lxx" AND B/N PER QSI 044 6.4 ALONG PERIMETER OF PART AS SHOWN.
- 7) WEIGHT: D3281-1L02 = 0.95 lb D3281-1L08 = 1.13 lb
- 8) THERMOFORM WITH MOLD D3281-1T1 PER DART QSI 022; TRIM AS SHOWN
MINIMUM THICKNESS AFTER FORMING: 0.070" EXCEPT WHERE INDICATED

0.95
0.50 (REF)

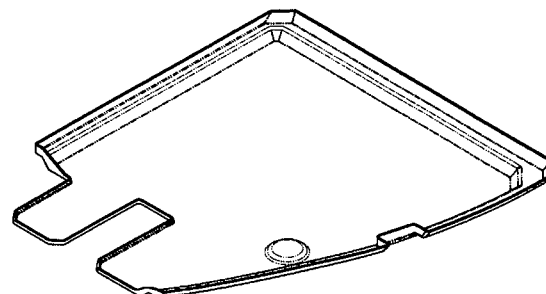




SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER

NO. 141610 MJS
1602-09 R 2010-11-25

F	NOTES UPDATED. FLAG NOTE 6 WAS 7 & RELOC. D.E.O. D3281-E-1 INC. DIM 17.0 WAS 17.1 (ZN B5-3, B6-4) & 17.7 WAS 17.8 (ZN C5-3, C6-4) REF CAR 10-21.	JPH	10.09.27
E	-3/4" NOW TRIMMED FLAT; RMV 0.25 BEVEL TO FACILITATE TRIMMING (ZN D6-3, D4-4)	CP	10.01.05
D	THICKNESS 0.093 WAS 0.125, MIN THICKNESS 0.070 WAS 0.080, P/N AND B/N ID WITH VIBRATING STYLUS (ZN A7-1, A7-2, A7-3, A7-4); D3281-4 NOW ON PAGE 4; CORRECT WEIGHTS (ZN A8-1, A8-2, A8-3, A8-4)	PH	08.03.28
C	UPDATE DIMS TO MATCH PARTS: COLOUR 701 WAS 700; GENERAL UPDATE	LE	07.10.09
B	NOW LEXAN; DIMS AS MANUFACTURED	CP	05.11.25
A	NEW ISSUE	CP	04.05.03
REV.	DESCRIPTION	BY	DATE

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D3281	SHEET 1 OF 4
APPROVED		TITLE	SCALE
DE APPR.		FLOOR PROTECTOR	NTS
DATE	10.09.27	COPYRIGHT © 2004 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

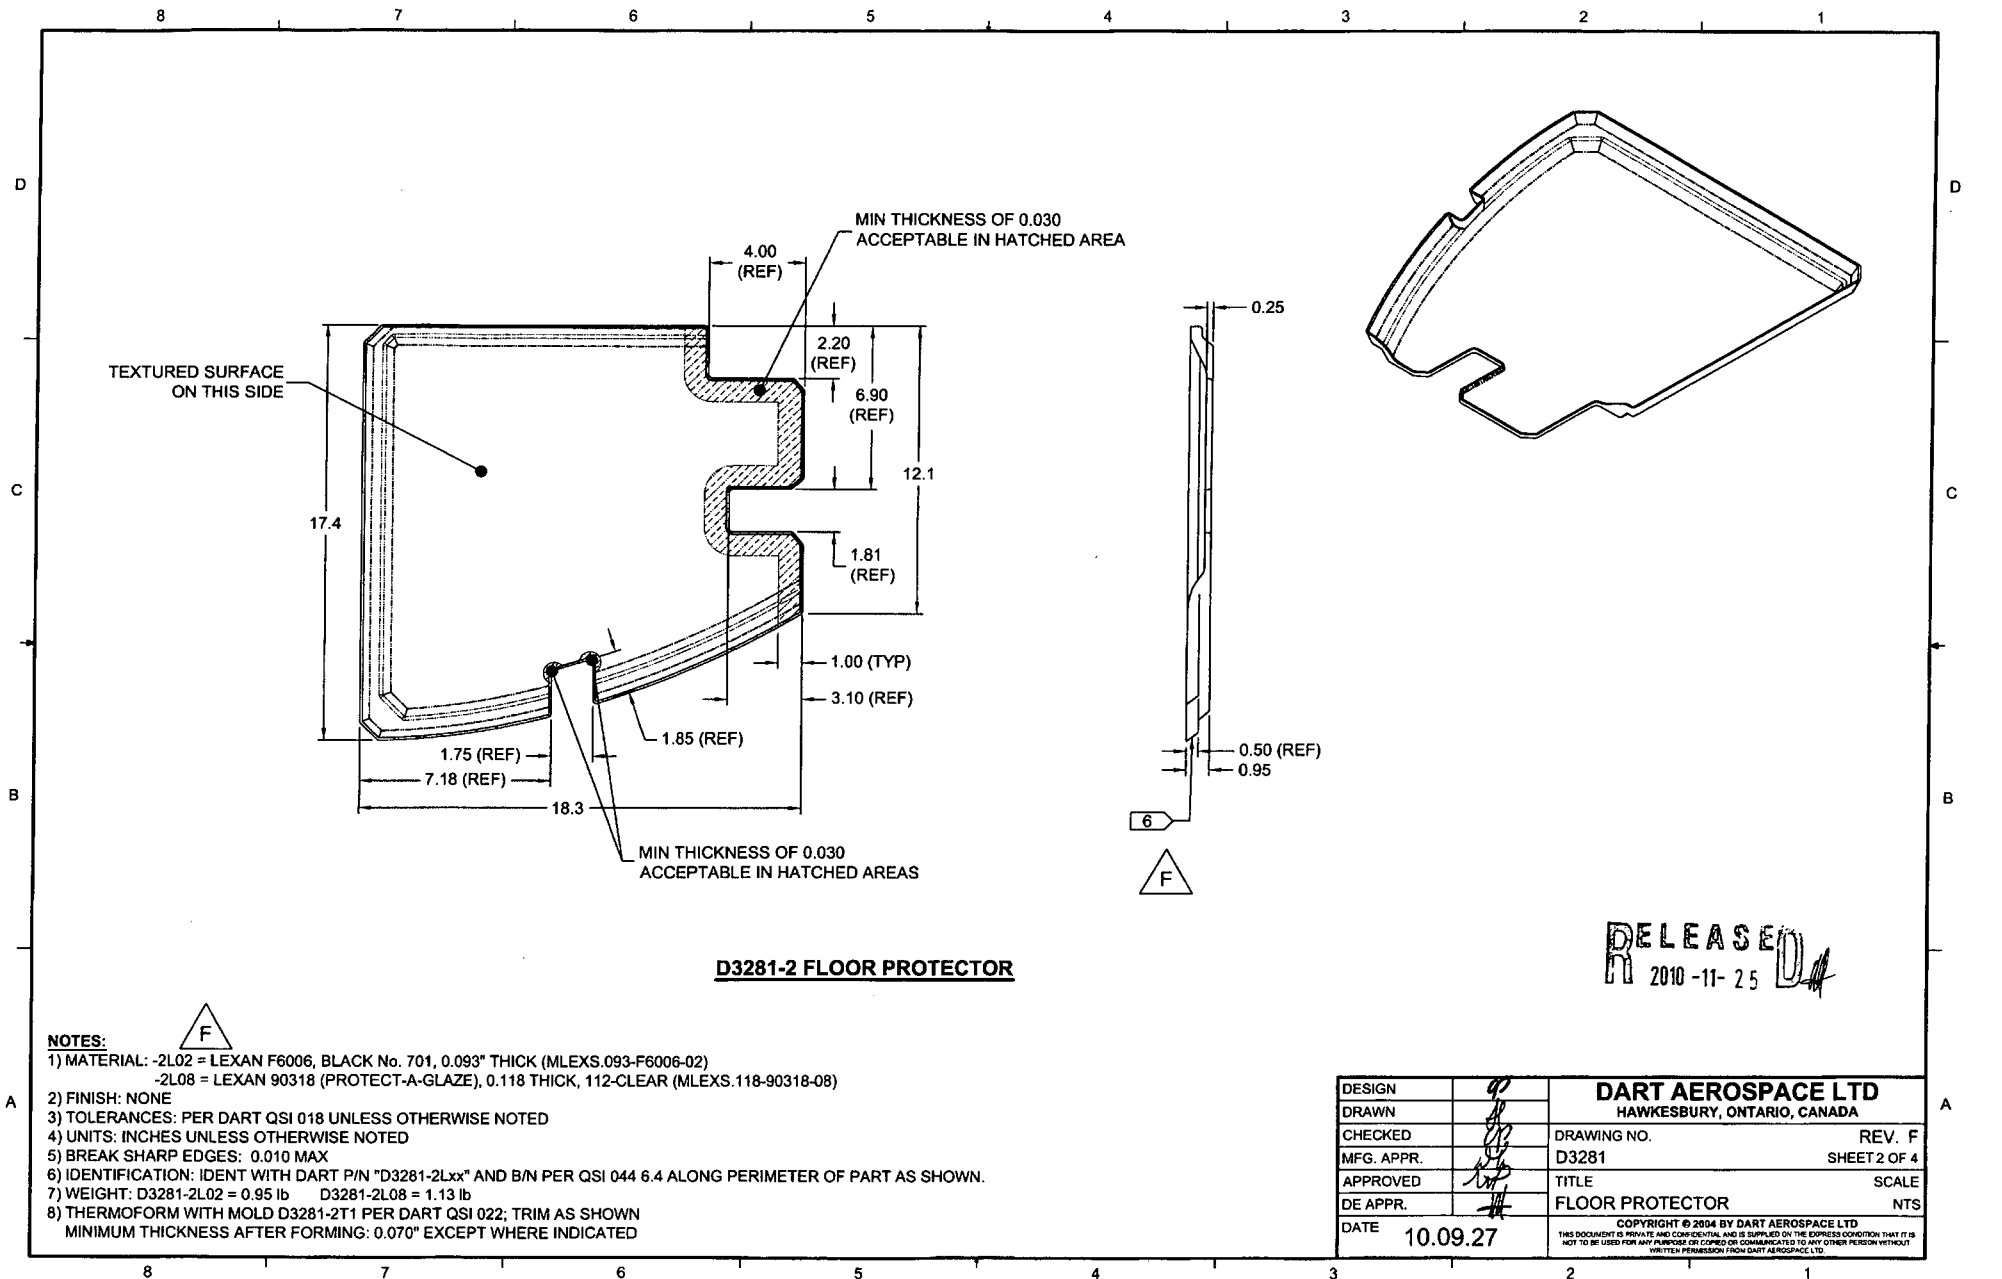

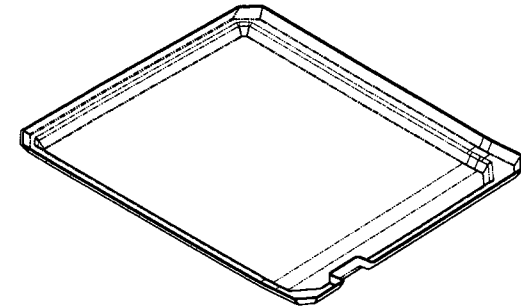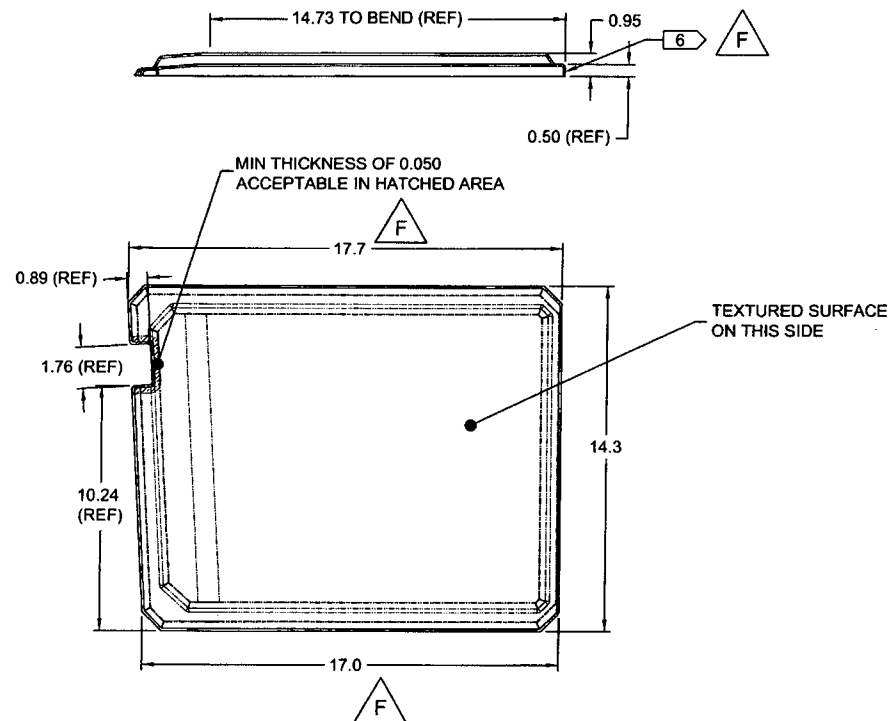




D3281-3 FLOOR PROTECTOR

NOTES:

- 1) MATERIAL: -3L02 = LEXAN F6006, BLACK No. 701, 0.093" THICK (MLEXS.093-F6006-02)
-3L08 = LEXAN 90318 (PROTECT-A-GLAZE), 0.118 THICK, 112-CLEAR (MLEXS.118-90318-08)
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 MAX
- 6) IDENTIFICATION: IDENT WITH DART P/N "D3281-3Lxx" AND B/N PER QSI 044 6.4 ALONG PERIMETER OF PART AS SHOWN.
- 7) WEIGHT: D3281-3L02 = 0.87 lb D3281-3L08 = 1.05 lb
- 8) THERMOFORM WITH MOLD D3281-3T1 PER DART QSI 022; TRIM AS SHOWN
MINIMUM THICKNESS AFTER FORMING: 0.070" EXCEPT WHERE INDICATED

RELEASE
2010-11-25

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D3281	SHEET 3 OF 4
APPROVED		TITLE	SCALE
DE APPR.		FLOOR PROTECTOR	NTS
DATE	10.09.27	COPYRIGHT © 2004 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

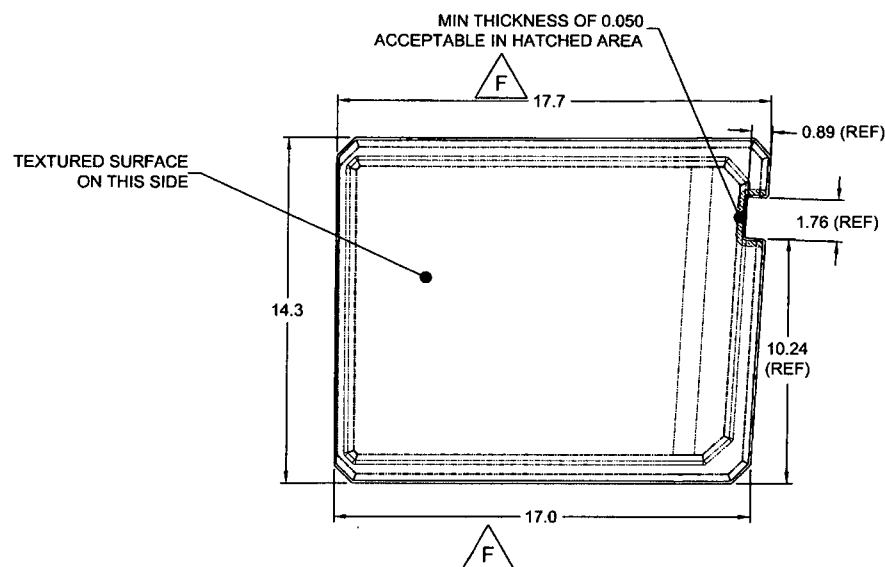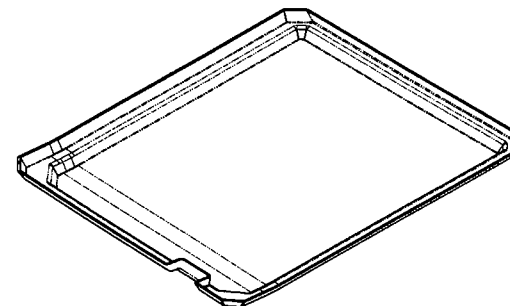

D3281-4 FLOOR PROTECTOR

D3281-4 NOTES:

- 1) MATERIAL: -4L02 = LEXAN F6006, BLACK No. 701, 0.093" THICK (MLEXS.093-F6006-02)
-4L08 = LEXAN 90318 (PROTECT-A-GLAZE), 0.118 THICK, 112-CLEAR (MLEXS.118-90318-08)
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 MAX
- 6) IDENTIFICATION: IDENTIFICATION: IDENT WITH DART P/N "D3281-4Lxx" AND B/N PER QSI 044 6.4 ALONG PERIMETER OF PART AS SHOWN.
- 7) WEIGHT: D3281-4L02 = 0.87 lb D3281-4L08 = 1.05 lb
- 8) THERMOFORM WITH MOLD D3281-4T1 PER DART QSI 022; TRIM AS SHOWN
MINIMUM THICKNESS AFTER FORMING: 0.070" EXCEPT WHERE INDICATED

RELEASED
2010-11-25

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D3281	SHEET 4 OF 4
APPROVED		TITLE	SCALE
DE APPR.		FLOOR PROTECTOR	NTS
DATE	10.09.27	COPYRIGHT © 2004 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS IIN-D044-719 REV. A
AND INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA-D044-719 REV. 0

REF TCCA STC: SH04-40
REF FAA STC: SR02051NY
REF EASA STC: EASA.IM.R.S.01075

PURPOSE:

To add the D044-719-011L08 Clear Cabin Floor Protectors. The -011L08 kit is similar to the existing -011 kit, however the plastic is transparent instead of solid black. The existing D044-719-011 kit will be re-identified as D044-719-011L02.

CHANGE:

The D044-719-011L08 Cabin Floor Protectors kit consists of four transparent plastic trays that are placed on the cabin floor to protect the carpets from damage. The -011L08 kit should be installed per the -011 kit of Installation Instructions IIN-D044-719 and maintained per Instructions for Continued Airworthiness ICA-D044-719. The parts list and weight & balance for the -011L08 kit is given below.

PARTS LIST

QTY -011L02	QTY -011L08	Part Number	Description
X		D044-719-011L02	Cabin Floor Protectors (Black)
	X	D044-719-011L08	Cabin Floor Protectors (Clear)
1		D3281-1L02	Floor Protector, Fwd LH, Black
	1	D3281-1L08	Floor Protector, Fwd LH, Clear
1		D3281-2L02	Floor Protector, Fwd RH, Black
	1	D3281-2L08	Floor Protector, Fwd RH, Clear
1		D3281-3L02	Floor Protector, Aft LH, Black
	1	D3281-3L08	Floor Protector, Aft LH, Clear
1		D3281-4L02	Floor Protector, Aft RH, Black
	1	D3281-4L08	Floor Protector, Aft RH, Clear
8	8	D2854-1-100	Looped Velcro Strip
8	8	D2854-3-100	Hooked Velcro Strip

WEIGHT AND BALANCE

Installation	Weight	Lateral		Longitudinal	
		Arm	Moment	Arm	Moment
D044-719-011L02 Cabin Floor Protectors	3.9 lb 1.8 kg	0 in 0 m	0 in-lb 0 m-kg	50 in 1.27 m	195 in-lb 2.3 m-kg
D044-719-011L08 Cabin Floor Protectors	4.4 lb 2.0 kg	0 in 0 m	0 in-lb 0 m-kg	50 in 1.27 m	220 in-lb 2.5 m-kg

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED
BY: 
D. SHEPHERD (DE # 02)
DATE: 10.02.24
CERT. NO.: SH04-40
ISSUE NO.: 1

A	NEW ISSUE	CP	10.02.24
REV.	DESCRIPTION	BY	DATE
DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. REV. A DSI 9504 SHEET 1 OF 1 TITLE SCALE FLOOR PROTECTOR KIT, CLEAR NTS COPYRIGHT © 2010 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	
DRAWN			
CHECKED			
MFG. APPR.	N/A		
APPROVED			
DE APPR.			
DATE	10.02.24		